

Main Features

- The control panel is positioned at the front of the machine and is provided with controls designed for ease of use
- The shafts rotate on ball bearings suitable for use under high-stress conditions
- The bowl protection guard complies with safety regulations. When lifte up, it activates a microswitch that automativally stops the machine.
- The unit rests of four rubber vibration mounts that guarantee stability and the reduction of noise levels.

Standard accesories include:

- Thin Wire Whisk
- Flat Beater
- Kneading Hook

C-131 (-111 11-W 1111F	C
SPECIFICATION	1.7

OI LOIIIO	
Voltage	400Vac 3 50Hz
Power	2.2 kw
Speed	Speeds - 3 speeds - 1° 34 RPM (0.9kw)
	2° 68 (1.8kw), 3° 136 (2.2kw)
Maximum Current	5.6A
Weight	210 kg
Plug Supplied	No
Bowl Lift	Manual
Bowl Capacity	60 liters
Bowl Diameter	460mm x 410mm
Humidity	Max 95%
Noise level	<70 decibel
Ambient Temp	Max 40°C
Warranty	4 Year Warranty (2 yr Labour 4 yr Parts)



OPTIONAL CONTROL -Variable Speed Inverter - Single Phase Operation

STANDARD CONTROL - 3 speeds with 3 phase Motor.





DIMENTIONS

External Width 690mm

External Depth 1030mm


External Height 1560mm




Phone: 1800 183 818 Email: support@thegoodlady.com.au Website: www.thegoodlady.com.au

FRONT


SIDE

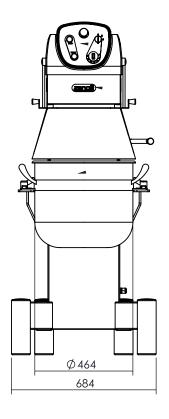


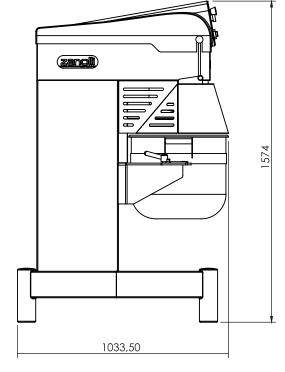

TOP

SIDE

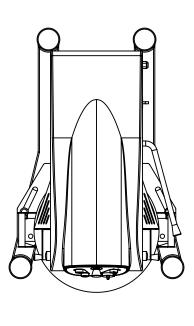

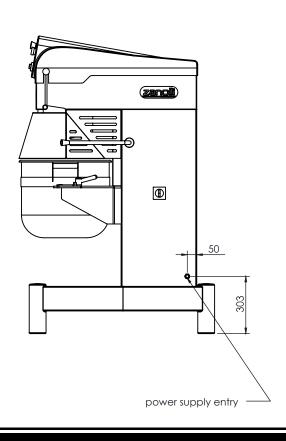

We reserve the right to alter specifications without notice.



Phone: 1800 183 818 Email: support@thegoodlady.com.au


Website: www.thegoodlady.com.au



PRODUCTIVITY CHART - Selene Mixers



TOOL GUIDE - Selene Mixers

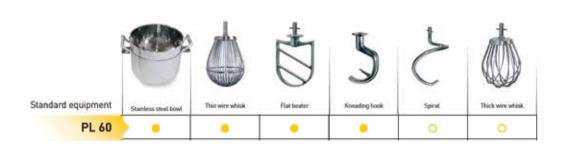

ACCESSORIES

Stainless Steel Bowl

Think Wire Wisk

Flat Beater

Kneading Hook

Steel kneading Spiral

Thick Wire Wisk

Scraper

Trolley for Bowl

Automatic Lifting System

Reduction Kit Bowl + Accessories Selene 60 to 20

Reduction Kit Bowl + Accessories Selene 60 to 40



Phone: 1800 183 818 Email: support@thegoodlady.com.au

Website: www.thegoodlady.com.au