SYNTHESIS 11/65 ELECTRIC CONVEYOR OVEN 2SV4406A



SPECIFICATIONS

| Voltage | Trifase, 400 Vac 50-60 Hz | |
|-----------------|---|--|
| | Current at 400V 3N~ 31.5 Amp | |
| Max Power | 18500 Watts | |
| Weight | 222 kg | |
| Plug Supplied | No, lead only | |
| Noise level | <70 Decibel | |
| Conveyor Width | 26" 650mm | |
| Conveyor Length | 1875mm | |
| Chamber Length | 1100mm | |
| Chamber Height | 100mm | |
| Cable Length | 2m | |
| Time Range | 2:20 minutes - 30 minutes(or complete halt) | |
| Thermostat | 320°C | |
| Ambient Temp | 0 - 40°C | |
| Max Humidity | 95% Humidity without condensation | |
| Warranty | 4 Year Warranty (2 yr Labour 4 yr Parts) | |

DIMENTIONS

| External Width | 2000mm | Internal Width | 1100mm |
|-----------------|--------|-----------------|--------|
| External Depth | 1400mm | Internal Depth | 650mm |
| External Height | 550mm | Internal Height | 100mm |



Main Features

- Made entirely from stainless steel
- Double glazed full width inspection door
- Easy access for thorough cleaning
- Cooling system for contact parts
- Omnidirectional wheels with breaks
- Conveyor belt with variable speed down to a complete halt
- 100 mm high cooking chamber
- Fine tuning of the ventilation flowJets of hot air completely wrap the product as it moves along the wire mesh conveyer giving an evenly cooked result time after time
- All Synthesis ovens are stackable so you can step up your productivity to meet peak demand
- Total control of Top heating % Power and Bottom Heating % Power allowing total control
- Management of 6 cooking programs: for each program you can set the cooking time, temperature and min/max adjustments to the power % of top / bottom Elements.
- Economy function keeps the oven at a lower temperature if it doesn't need to be operated at full working temperature
- Timer for programmed start, digital clock and self diagnostics




Phone: 1800 183 818 Email: support@thegoodlady.com.au Website: www.thegoodlady.com.au


SYNTHESIS 11/65 SINGLE STACK CONVEYOR



FRONT

SIDE

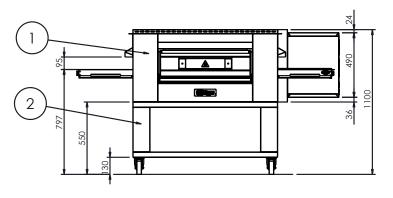


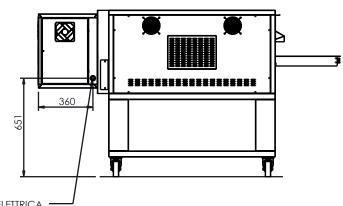


INGRESSO ALIMENTAZIONE ELETTRICA -

| Num. articolo | Quantità | Descrizione | Potenza |
|------------------|----------|----------------------|------------|
| 11 | | SYNTHESIS 11/65V EL. | 18+0.81 kW |
| 21 | | BASAMENTO H=550 | - |

TOP

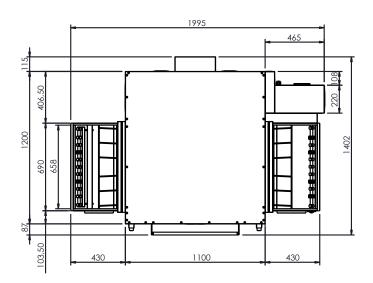

REAR

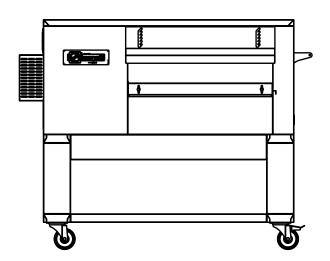


We reserve the right to alter specifications without notice.




Phone: 1800 183 818 Email: support@thegoodlady.com.au Website: www.thegoodlady.com.au

SYNTHESIS 11/65 DOUBLE STACK CONVEYOR

FRONT

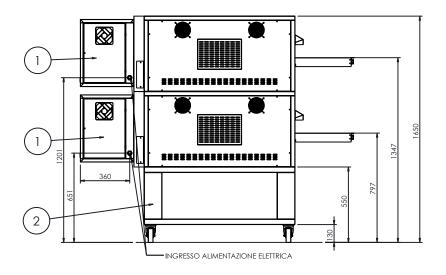


| Num. articolo | Quantità | Descrizione | Potenza |
|------------------|----------|----------------------|------------|
| 12 | | SYNTHESIS 11/65V EL. | 36+1.62 kW |
| 21 | | BASAMENTO H=550 | - |

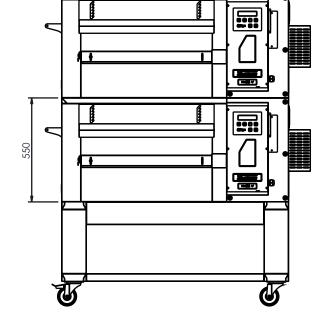

SIDE

TOP

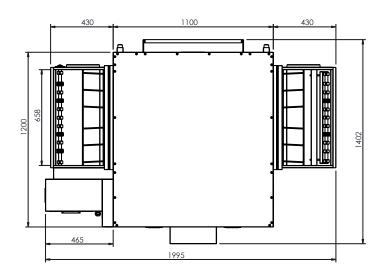

We reserve the right to alter specifications without notice.




Phone: 1800 183 818 Email: support@thegoodlady.com.au Website: www.thegoodlady.com.au




SYNTHESIS 11/65 TRIPLE STACK CONVEYOR

FRONT

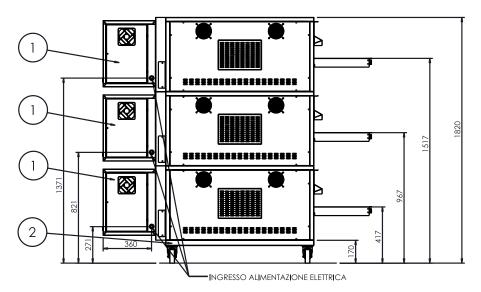

| Num. articolo | Quantità | Descrizione | Potenza |
|------------------|----------|----------------------|------------|
| 1 | 3 | Synthesis 11/65V el. | 54+2.43 kW |
| 2 | 1 | BASAMENTO H=170 | - |

TOP

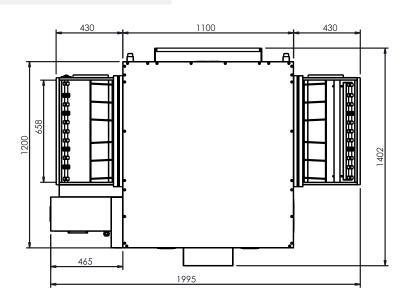

We reserve the right to alter specifications without notice.



Phone: 1800 183 818 Email: support@thegoodlady.com.au Website: www.thegoodlady.com.au



SIDE